


Instellingenblad Symbol LI 4278 USB-kbw (760515)



GOED

SLECHT

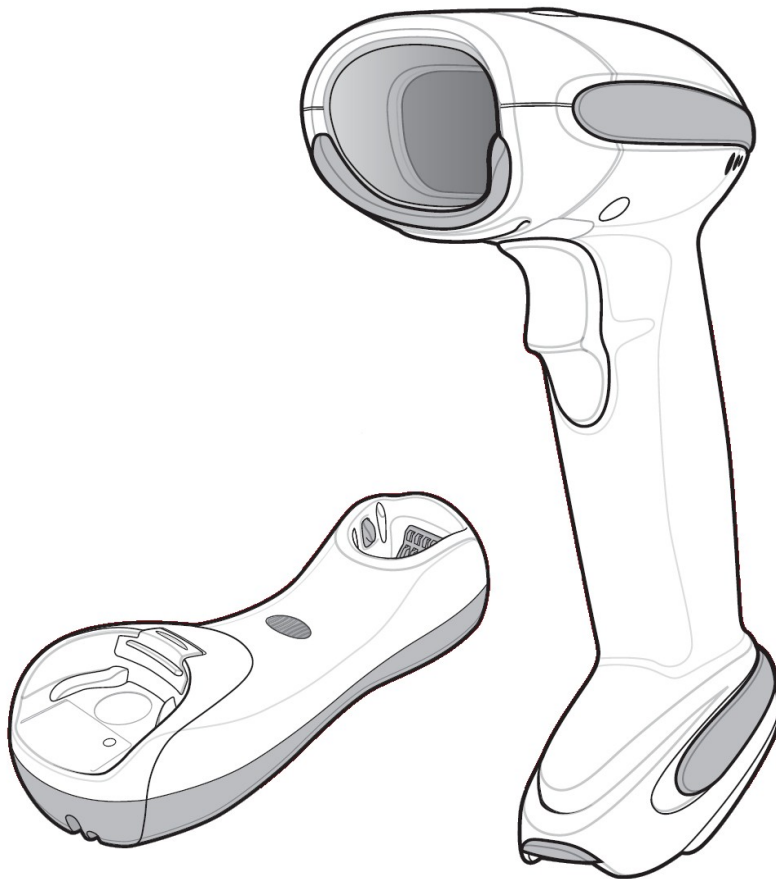

SLECHT



Instellingenblad Symbol LI 4278 USB-kbw (760515)

1. Restore Defaults



2. Scan de barcode op de cradle (houder) in om de scanner met de cradle te verbinden.

3. Low Beeper Volume



4. Scan Options (Suffix)



5. Data (Suffix)




6. Enter



Instellingenblad Symbol LI 4278 USB-kbw (760515)

7. Enable Interleaved 2 of 5

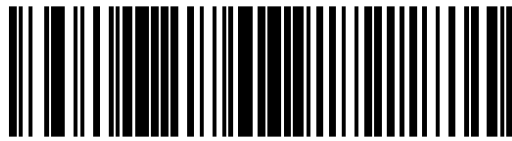

0



6



1



6

